




Asymmetrical Recessed Stair and Wall Light SABA

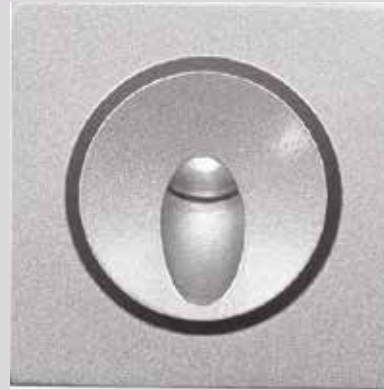

■ sanded dark grey ■ silver ■ sanded black



12# Die-casting aluminum T=20-25µm. Adhesion of ISO class 1/ ASTM class 4B high temperature painting

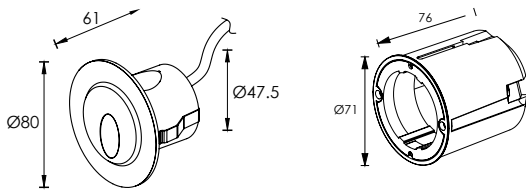

331 126

LED Power	Colour Temp	Luminous
24V - 2,6W	2000K	64,7 lm
120/240V - 3,0W	3000K	60 lm
	6000K	

LIGHT DISTRIBUTION

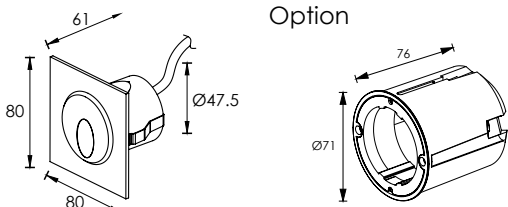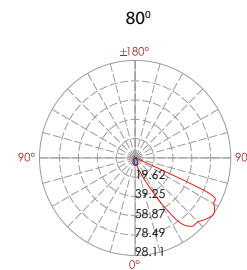


Option

331 127

LED Power	Colour Temp	Luminous
24V - 2,6W	2000K	64,7 lm
120/240V - 3,0W	3000K	60 lm
	6000K	

LIGHT DISTRIBUTION

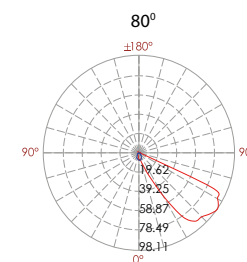

Mounting sleeve 035#