


Recessed Stair & Wall Light SABA



sanded dark grey


12 # Die-casting dark grey powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

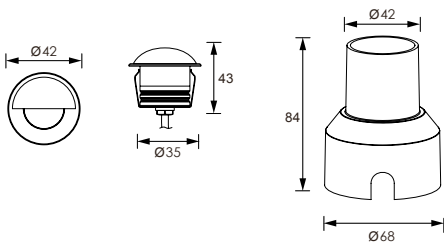


331 128

LED Power	Colour Temp	Luminous
24V - 1,3W	2000K	28 lm
	3000K	23 lm
	6000K	

LIGHT DISTRIBUTION

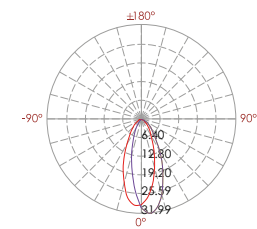


20°

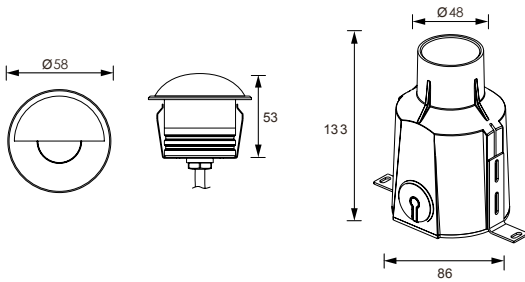


331 129

LED Power	Colour Temp	Luminous
24V - 2,6W	2000K	60 lm
	3000K	51 lm
	6000K	

LIGHT DISTRIBUTION

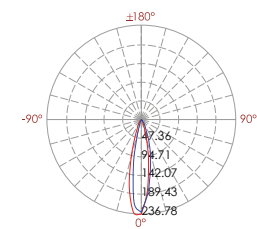


22°

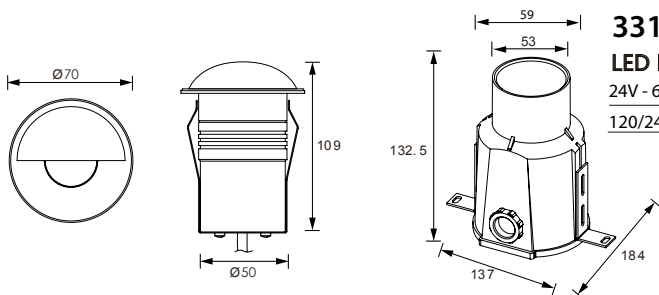

331 130

LED Power	Colour Temp	Luminous
24V - 6,3W	2000K	237 lm
120/240V - 6,0W	3000K	208 lm
	6000K	

LIGHT DISTRIBUTION

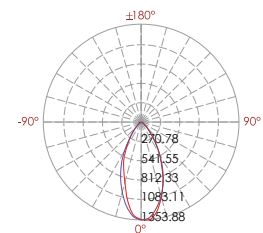

18° 24° 32°