



Wall Mounting Flood & Spot Light Architectural and Landscape Light QAMRA




sanded dark grey | silver grey | sanded black | sanded white

12" Die-casting dark grey powder coated aluminum.
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

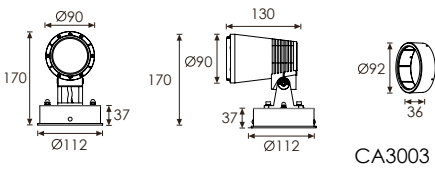


CA3003




332 212

LED Power	Colour Temp	Luminous
24V - 14,5W	2000K	1238 lm
120/240V - 15,1W	3000K	1018 lm
	6000K	


LIGHT DISTRIBUTION



9°(B33F) 15° 20° 30° 45°

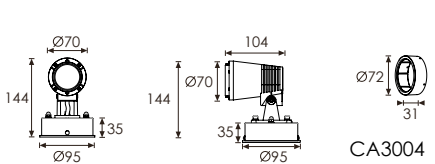



CA3004



332 213

LED Power	Colour Temp	Luminous
24V - 7,2W	2000K	298lm
120/240V - 8,3W	3000K	263lm
	6000K	

LIGHT DISTRIBUTION



15° 22°