



# Inground Light Symmetrical Power LED TRUAX

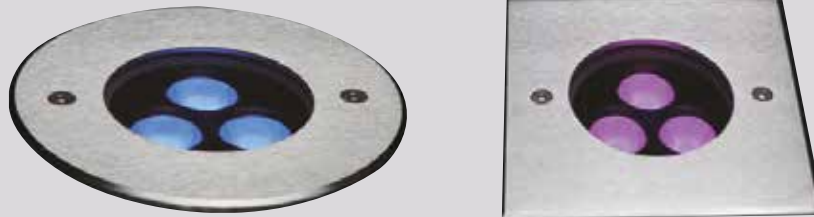

Hard chromeplated Stainless steel SUS 316L  
12# Die-casting grey powder coated aluminum.  
T=60-80µm Adhesion of ISO class 1/ASTM class 4B



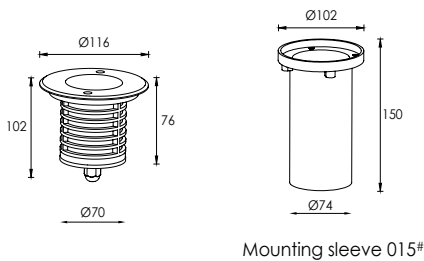


Mounting sleeve 015#

## 334 142

LED Power	Colour Temp	Luminous
24V - 5,2W	2000K	479 lm
120/240V - 6,0W	3000K	376 lm
	6000K	

## LIGHT DISTRIBUTION

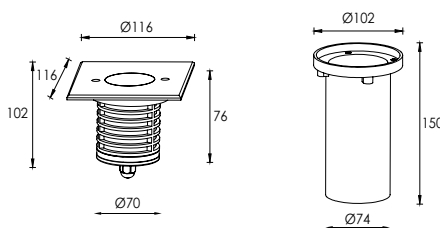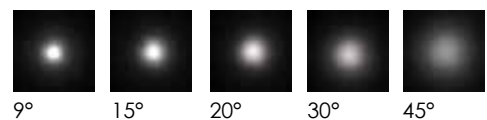

Mounting sleeve 015#

## 334 143

LED Power	Colour Temp	Luminous
24V - 5,2W	2000K	479 lm
120/240V - 6,0W	3000K	376 lm
	6000K	

## LIGHT DISTRIBUTION

