



Inground Light Symmetrical High Luminance LED Light TRUAX



Hard chromeplated Stainless steel SUS 316L
12# Die-casting grey powder coated aluminum.
T=60-80µm Adhesion of ISO class 1/ASTM class 4B







Mounting sleeve 057#

334 150

LED Power	Colour Temp	Luminous
24V - 20,4W	2000K	1866 lm
120/240V - 18,6W	3000K	1605 lm
	6000K	

LIGHT DISTRIBUTION

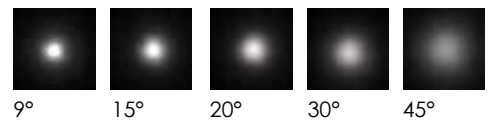

Mounting sleeve 057#

334 151

LED Power	Colour Temp	Luminous
24V - 20,4W	2000K	1866 lm
120/240V - 18,6W	3000K	1605 lm
	6000K	

LIGHT DISTRIBUTION

